




DHL49

49" Full-HD LCD Monitor



Features :

- Industrial level DID LCD panel, suitable for extensive 7x24 continuous works
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- Abundant interfaces HDMI, DVI, VGA, BNC, support video loop
- Brightness smart detection, power-saving
- Using Tamper-proof metal housing, no radiation
- Built-in power, low energy consumption, ultra-quiet



Technical Specification

Model

Model DHL49

System

Diagonal 49"(16:9)

Resolution 1920x1080 (FHD)

Backlight LED

Brightness/Luminance (Standard) 450 cd/ m²

Contrast 1100:1

Angle of view 178°/178°(vertical/horizontal)

Response time 5.8ms

Signals

Input	standard	CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1
	optional	Audio×1, RJ45×1, HDCVI×1, SDI×1, DP×1
Output	Standard	CVBS(BNC)×2, RS232×1
	optional	Audio×1, DP×1

General

Consumption (Standard) 60W

Consumption (Standby) ≤1W



Power Supply	AC100~240V (+/-10%),50/60 Hz
Weight	15kg
Dimensions(no base)	1127.1×667.3×52.9mm
Work Environment	Temperature:0 C~50 C
	Humidity:20%~90%

Accessory

Standard	VGA cable, power cable
Optional	Pedestal, hanging bracket



Dimensions(mm)

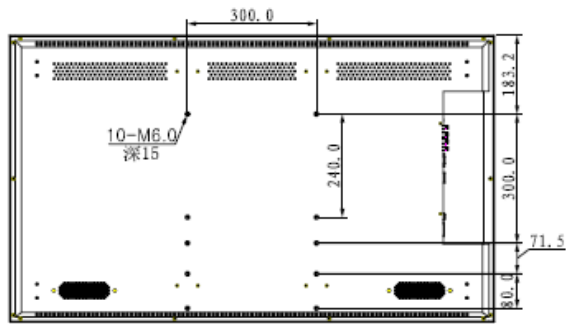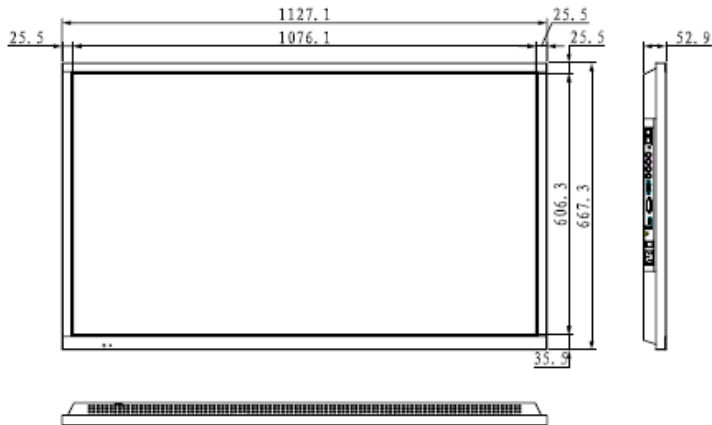

AC100 ~ 240V 1.2A 50/60 HZ	ON				CVBS1		CVBS2				
AC IN	OFF				IN	OUT	IN	OUT	AVOID-IN	LAN in	LAN out